



X1-Micro 2 in 1

The Solax X1-Micro series is renowned for its exceptional power output, positioning itself as one of the top-rated models among 2-in-1 microinverters, boasting an impressive capacity of up to 1200 VA. Specifically designed to cater to the latest and previous generation of high-power modules, these microinverters feature two independent MPPTs and robust support for input current and output power. Seamlessly incorporating Wi-Fi wireless technology, the X1-Micro series ensures reliable and consistent communication, offering users a smooth monitoring and control experience. Delivering a cost-effective solution, these microinverters are highly suitable for both residential and commercial solar applications. Furthermore, they are fully compatible with the Solax Hybrid system and seamlessly integrate with various AC coupled systems available in the market, thus enhancing their versatility and adaptability.




X1-Micro 750 / X1-Micro 800 / X1-Micro 900
X1-Micro 1000 / X1-Micro 1200

Features

- Max output power up to 1200VA with two independent input channels(MPPT)
- Up to 20A DC input current to be compatible with the high power PV module
- Built-in industrial grade Wi-Fi module for high reliability
- Safety protection relay integrated
- Support micro-grid, AC coupling solution with existing storage system
- Support the integration of a single-phase microinverter into a three-phase power grid system
- With Reactive Power Control and Rapid Shutdown Function
- Easy to install and maintain with small size, light weight
- IP67 protection class, more reliable

Communication Diagram

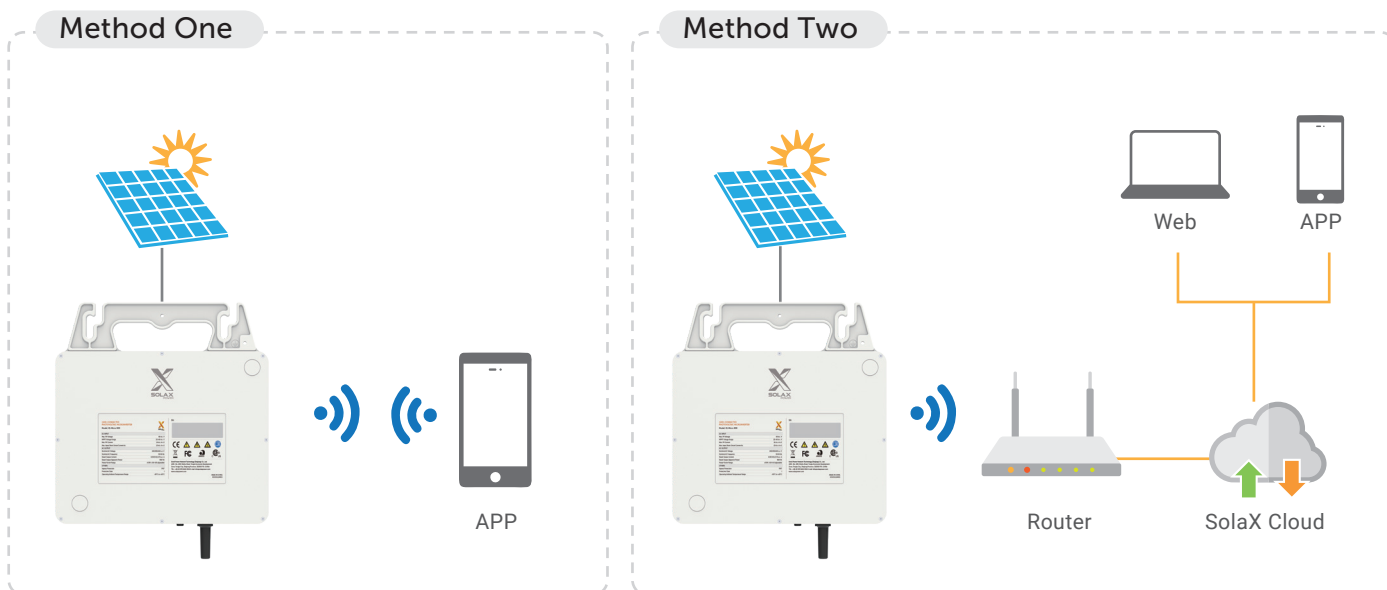

	X1-Micro 750	X1-Micro 800	X1-Micro 900	X1-Micro 1000	X1-Micro 1200
DC INPUT					
Max. PV input power [W]	240 to 470+	320 to 540+	360 to 600+	400 to 670+	400 to 670+
Max. PV input voltage [V]	60				
MPPT voltage range [V]	22-60				
Start-up voltage [V]	22				
Max. PV input current [A]	2 × 15	2 × 15	2 × 16	2 × 20	2 × 20
Max. input short circuit current I _{sc} [A]	2 × 20	2 × 20	2 × 25	2 × 25	2 × 25
No. of MPP trackers	2				
Strings per MPP tracker	1				
AC OUTPUT					
Rated AC output power [VA]	750	800	900	1000	1200
Maximum continuous output power [VA]	750	800	900	1000	1200
Maximum continuous output current [A]	3.41@220V 3.26@230V 3.13@240V	3.64@220V 3.48@230V 3.34@240V	4.10@220V 3.92@230V 3.75@240V	4.55@220V 4.35@230V 4.17@240V	5.46@220V 5.22@230V 5.00@240V
Rated grid voltage/range [V]	220 or 230 or 240 / 180-264				
Nominal AC frequency/range [Hz]	50/45-55 or 60/55-65				
Maximum units per 10AWG branch*	11@220V 12@230V 12@240V	11@220V 11@230V 12@240V	9@220V 10@230V 10@240V	8@220V 9@230V 9@240V	7@220V 7@230V 8@240V
Maximum units per 12AWG branch*	9@220V 9@230V 10@240V	8@220V 9@230V 9@240V	7@220V 8@230V 8@240V	7@220V 7@230V 7@240V	5@220V 6@230V 6@240V
Power Factor range	>0.99(-0.8~0.8 adjustable)				
THDi (Rated power) [%]	<3				
EFFICIENCY					
Max. Efficiency	96.50%				
Nominal MPPT efficiency	99.9%				
Night power consumption [mW]	< 40				
STANDARD					
Safety	IEC 62109				
EMC	IEC 61000, EN 62920, EN 301489, EN 55011				
Grid Connection Standard	IEC 61727, IEC 62116, EN 50549, VDE-AR-N 4105, ORDINANCE No. 140, ORDINANCE NO. 515				
ENVIRONMENT LIMIT					
Ingress protection rating	IP67				
Operating ambient temperature range [°C]	-40 to 65				
Humidity[%]	0 ~ 100 (condensing)				
Storage temperature [°C]	-40 to 65				
GENERAL					
Dimension(W x H x D) [mm]	260 × 212 × 40				
Weight [kg]	4.1				
Cooling concept	Natural convection				
Communication	Built-in Wi-Fi				
Monitoring	Solax Cloud				

* Refer to local requirements for exact number of microinverters per branch.

*V1.7. Information may be subject to modify without notice.